



LED Tube Lighting Pty. Ltd.

ACN 163 405 810

Supplier number E2183

Head Office:
47 Alexandra Rd
Ascot Qld 4007


T: (07) 3040 0331
E: info@ledtubelighting.com.au
W: www.ledtubelighting.com.au

Specification Sheet

Movement Sensor T8 LED Tube – Passive Infrared



Features

- Sensor distance: 5-7m
- High Efficiency >95lm/watt
- Aluminum construction
- 2 Year Warranty
- No flicker, instant start.
- Safety LED Fuse included
- Suitable for indoor use only
- RCM 

Technical Specifications

Model		LEDTL-ZL-P18GY-T8
PIR Sensor	Distance	5-7meters
	Duration	Set at factory 20s -5m
	Untriggered brightness	Set at factory 0-30%
Electrical Data	Input Voltage	100-265volt
	Input Power	18w
End Cap	G13	Non-rotating
Light Technical Data	luminosity	1800lm (milky cover)
	Beam Angle	120°
	Colour Temp	4500k or 6000k
	CRI	>70
	Dimmable	No
	Ta	-10°C to +40°C
	Power Factor	>.90
Dimensions	Length	1200mm



LED Tube Lighting Pty. Ltd.

ACN 163 405 810

Supplier number E2183


Head Office:
47 Alexandra Rd
Ascot Qld 4007

T: (07) 3040 0331
E: info@ledtubelighting.com.au
W: www.ledtubelighting.com.au

Also available in

- clear and striped cover
- 1500mm, 900mm, 600mm and custom lengths

Fitting Instructions

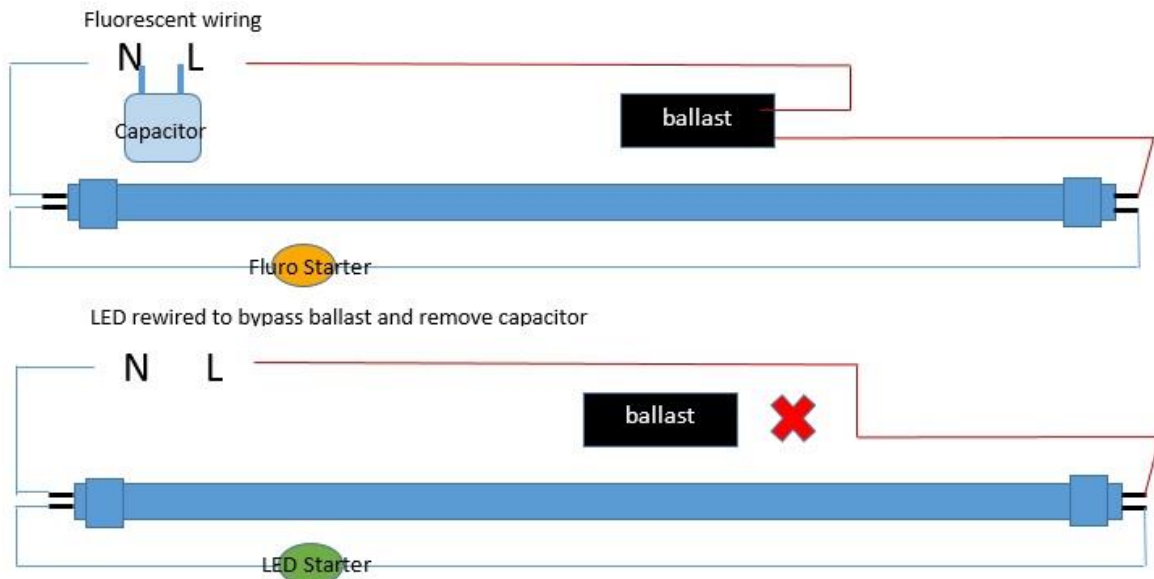

For a full instruction sheet on why and how to remove a capacitor and bypass a ballast please call 07 30400331 or email info@ledtubelighting.com.au.

Please ensure that all electrical rewiring is conducted by a qualified electrician.